

LINKAGE / LOADER BUCKET



TECHNICAL DATA LINKAGE

Lifting capacity

500 kg



TECHNICAL LOADER BUCKET

Width

900 mm

Volume

0.16 m³





Linkage +
Loader bucket



Linkage +
Shears lawnmower
with two side arms



FLAIL
MOWER

SPRAYER

LINKAGE
LOADER BUCKET

TRIMMER

ROTARY
PLOUGH

TRANSPORTATION
PLATFORM

DUMPER
SKIP

LINKAGE

Standard Linkage



Mount plate with quick-release hook cat. 1



Adjustable (optional).

Pivoted mounting frame



The hydraulic ally pivoted mounting frame allows lateral pivoting of accessories by $\pm 8^\circ$ (optional).

Swivel-mount frame with side shift



The hydraulic swivel-mount frame with side shift features an implement swivel range of $\pm 15^\circ$ to the side, and a side shift of ± 150 mm.

Hydraulic system

For 5 additional cylinder movements (optional).



Kit PTO




Linkage + third-party manufacturer



LOADER BUCKET



Loader bucket

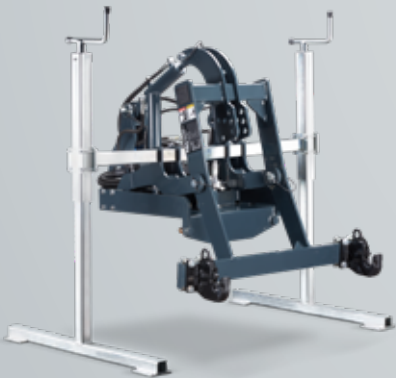

FLAIL
MOWER

SPRAYER

LINKAGE
LOADER BUCKET

TRIMMER

ROTARY
PLOUGH

TRANSPORTATION
PLATFORM

DUMPER
SKIP