

Accessory

Sprayer SP 200-60

The SP 200-60 sprayer stands out with its compact design, a 200-liter tank, and a powerful fan. Thanks to its low weight, the machine remains exceptionally maneuverable and easy to handle even with the sprayer attached. The sophisticated construction allows for comfortable operation and efficient use even under demanding conditions. As a result, the SP 200-60 offers a powerful and practical solution for a wide range of applications in fruit and viticulture.

For a long service life and high corrosion resistance, both the fan and the supporting metal structure are completely made of stainless steel. The spray tanks are made of high-quality polyethylene, combining low weight with high durability.



Technical data


Capacity	200 l / 53 gal
Pump	26 l/min at 40 bar, 3 membranes / 7 gal/min at 40 bar, 3 membranes
Aspiration filter	Arag 312
Pressure filter	Braglia M144 with automatic return
Agitator	Hydraulic
Nozzles	10 pieces Albuz
Air flow rate	22,500 m³/hour / 793,000 ft³/hour
Maximum pressure	40 bar
Required hydraulics	30 - 35 l/min / 7.93 - 9.25 gal/min at 250 bar
Illumination	Optional, powerful LED lighting
Weight	when empty 140 kg / 309 lbs when full 390 kg / 860 lbs

Products

Round-flow fan

The round-flow fan is designed to meet the unique requirements of low pergola systems.

SP 200-60R

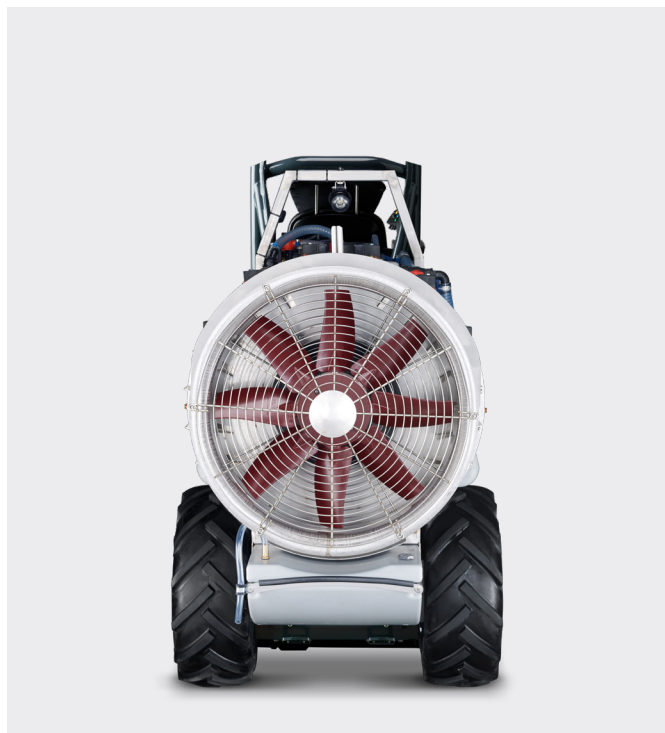

Cross-flow fan

SP 200-60Q



Configuration



Sprayer




Radial cross flow
SP 200-60R




Low cross flow
SP 200-60Q




Spraying equipment
from other
manufacturers




Nozzle holder
single
(Quick Cap System)




Nozzle holder
double
(Quick Cap System)



Nozzle holder
triple
(Quick Cap System)




Nozzles Albuz
ATI 80°



Nozzles Albuz
CVI 80°
(drift reduction)




Angle sensor

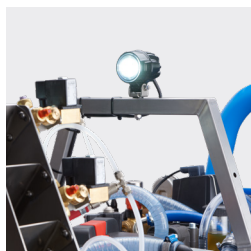

Work light



Pressure sensor

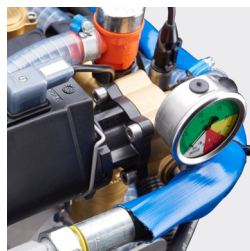

Pressure sensor &
electric pressure
regulator



Tank drain valve



Rear light bracket



Parking jacks

